



BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / JIC FEMALE 74° SEAT

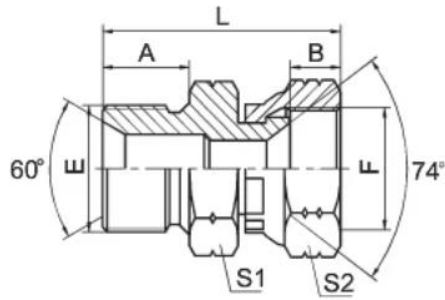

2BJ

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2BJ-04	G1/4"X19	7/16"X20	12	9	26	19	15
2BJ-04-05	G1/4"X19	1/2"X20	12	9.5	26.5	19	17
2BJ-04-06	G1/4"X19	9/16"X18	12	10.5	27	19	19
2BJ-04-08	G1/4"X19	3/4"X16	12	11	29	19	24
2BJ-06	G3/8"X19	9/16"X18	13.5	10.5	30.5	22	19
2BJ-06-08	G3/8"X19	3/4"X16	13.5	11	32.5	22	24
2BJ-06-10	G3/8"X19	7/8"X14	13.5	13	33	22	27
2BJ-08	G1/2"X14	3/4"X16	16	11	37	27	24
2BJ-08-06	G1/2"X14	9/16"X18	16	10.5	35	27	19
2BJ-08-10	G1/2"X14	7/8"X14	16	13	37.5	27	27
2BJ-10	G5/8"X14	7/8"X14	17.5	14	37.5	30	27
2BJ-12	G3/4"X14	1.1/16"X12	18.5	15	42	32	32

JIC - Female x BSP - Male

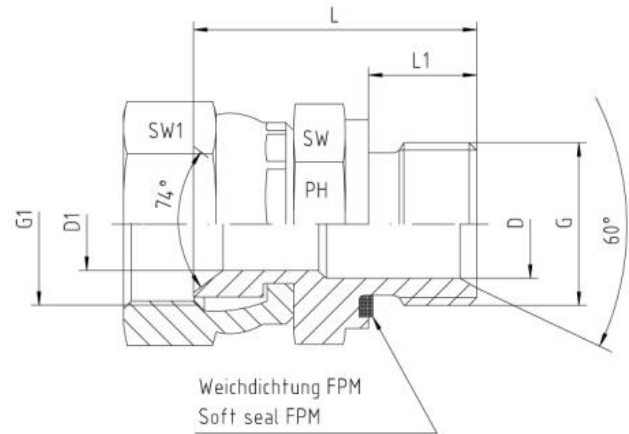

Pressure	Tube O.D.		Thread		Approx. Dimensions						
	PN	mm	in.	G1 = UNF/UN	G = BSP	L	L1	D	D1	SW1	SW
350	6	1/4"		7/16"-20	1/4"-18	29,0	12,0	4,5	4,5	17	19
350	6	1/4"		7/16"-20	3/8"-18	30,5	12,0	7,0	4,5	17	22
350	10	3/8"		9/16"-18	3/8"-18	30,0	12,0	7,0	7,0	19	22
350	12	1/2"		3/4"-16	1/2"-14	36,0	14,0	10,0	10,0	24	27
350	18, 20	3/4"		1 1/16"-12	3/4"-14	40,0	16,0	15,0	15,0	32	32
280	25	1"		1 5/16"-12	1"-11	45,0	18,0	21,0	21,0	41	41