

### Additional Data/Spec Sheet

#### LP Brass Adapter Fittings – Compression Equal Tee

## 164C-264C

Union Tee  
Ref. SAE 060401 BA



Part Number	Tube Size	Straight Thread
164C-2	1/8	5/16-24
264C-3	3/16	3/8-24
164C-4	1/4	7/16-24
264C-4	1/4	7/16-24
164C-5	5/16	1/2-24
164C-6	3/8	9/16-24
164C-8	1/2	11/16-20
164C-10	5/8	13/16-18
164C-12	3/4	1.00-18

## 164C-264C

Union Tee  
Combination Sizes  
Ref. SAE 060401 BA



Part Number	Tube Size 1	Tube Size 2	Tube Size 3
164C-6-4-4	3/8	1/4	1/4
164C-6-6-4	3/8	3/8	1/4
164C-8-8-6	1/2	1/2	3/8


PRESSURE RANGE @73°F		
PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
400	1/8	.030
400	9/16	.030
300	1/4	.030
300	5/16	.032
200	3/8	.032
200	1/2	.032
150	5/8	.035
100	3/4	.035
75	7/8	.035

1. PRESSURE RATING IS BASED ON USE WITH SOFT METAL TUBING @ 73° F.

2. THERMOPLASTIC TUBES USING ACETAL SLEEVE 60PT AND BRASS INSERT 63PT HAVE PRESSURE RANGES UP TO THE TUBE'S RATED WORKING PRESSURE.

## Union Tee 164C-264C


REF. SAE 060401 BA

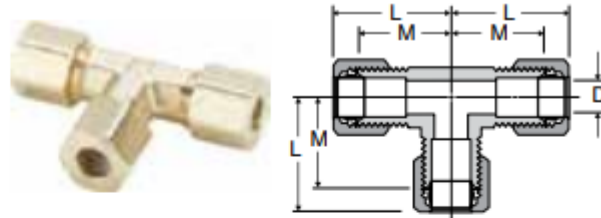

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164C-2	1/8	5/16-24	.82	.61	.094
264C-3	3/16	3/8-24	.84	.60	.125
164C-4	1/4	7/16-24	.86	.63	.188
264C-4	1/4	7/16-24	.84	.60	.188
164C-5	5/16	1/2-24	.98	.71	.250
164C-6	3/8	9/16-24	1.03	.74	.312
164C-8	1/2	11/16-20	1.34	.93	.406
164C-10	5/8	13/16-18	1.54	1.08	.500
164C-12	3/4	1.00-18	1.65	1.17	.563

## Union Tee 164C-264C Combination Sizes

REF. SAE 060401 BA

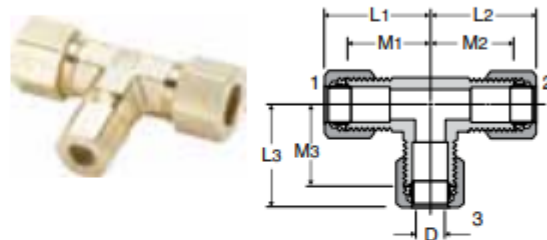

PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L1	L2	L3	M1	M2	M3	FLOW DIA. D
164C-6-4-4	3/8	1/4	1/4	1.03	.96	.96	.75	.72	.72	.188
164C-6-6-4	3/8	3/8	1/4	1.03	.96	.96	.75	.75	.72	.188
164C-8-8-6	1/2	1/2	3/8	1.34	1.16	1.16	.94	.94	.88	.312