

### Additional Data/Spec Sheet

LP Brass Adapter Fittings – NPT Male x NPT Female 90° Elbow

## 1202P-2202P

90° Street Elbow

Part Number	Pipe Thread 1	Pipe Thread 2
1202P-2-2	1/8	1/8
2202P-2-2	1/8	1/8
2202PA-2-2*	1/8	1/8
2202P-4-2	1/4	1/8
1202P-4-4	1/4	1/4
2202P-4-4	1/4	1/4
2202PA-4-4*	1/4	1/4
2202P-4-6	1/4	3/8
1202P-6-4	3/8	1/4
1202P-6-6	3/8	3/8
2202P-6-6	3/8	3/8
2202PA-6-6*	3/8	3/8
1202P-6-8	3/8	1/2
1202P-8-6	1/2	3/8
2202P-8-8	1/2	1/2
2202P-12-8	3/4	1/2
2202P-12-12	3/4	3/4


1202P



2202P



\* Meets SAE dimensions.

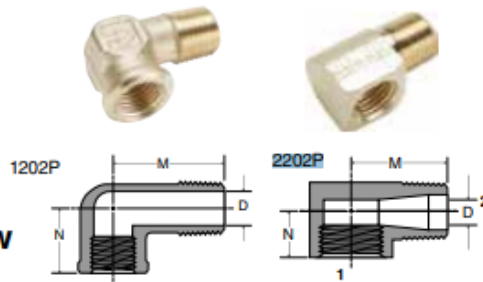

## 90° Street Elbow 1202P-2202P

PART NO.	1 PIPE THREAD	2 PIPE THREAD	M	N	FLOW DIA. D
1202P-2-2	1/8	1/8	.81	.56	.22
2202P-2-2	1/8	1/8	.62	.48	.22
2202PA-2-2*	1/8	1/8	.66	.48	.22
2202P-4-2	1/4	1/8	.72	.45	.23
1202P-4-4	1/4	1/4	1.08	.69	.31
2202P-4-4	1/4	1/4	.91	.45	.34
2202PA-4-4*	1/4	1/4	.91	.72	.31
2202P-4-6	1/4	3/8	.97	.78	.43
1202P-6-4	3/8	1/4	1.25	.78	.31
1202P-6-6	3/8	3/8	1.25	.78	.42
2202P-6-6	3/8	3/8	.98	.54	.41
2202PA-6-6*	3/8	3/8	.97	.78	.43
1202P-6-8	3/8	1/2	1.53	1.01	.56
1202P-8-6	1/2	3/8	1.25	.97	.42
2202P-8-8	1/2	1/2	1.25	1.03	.56
2202P-12-8	3/4	1/2	1.39	1.10	.56
2202P-12-12	3/4	3/4	1.39	1.10	.75

\*Meets SAE Dimensions

## Assembly Instructions

### Elbow or Tee Fittings

1. Hand tighten external thread into internal thread
2. Tighten an additional 1 to 1 1/2 turns with a wrench
3. Tighten fitting, clockwise to align with tubing. (Never counter clockwise)

Note: To minimize the possibility of a leaking threaded joint after assembling Male to female pipe threads, neither end should be backed out (loosened) Once the assembly has been made.