


Additional Date/Spec Sheet

Cetop 3 NG6 DSG-01 DC & RAC Coils

DSG
01
DC/RAC

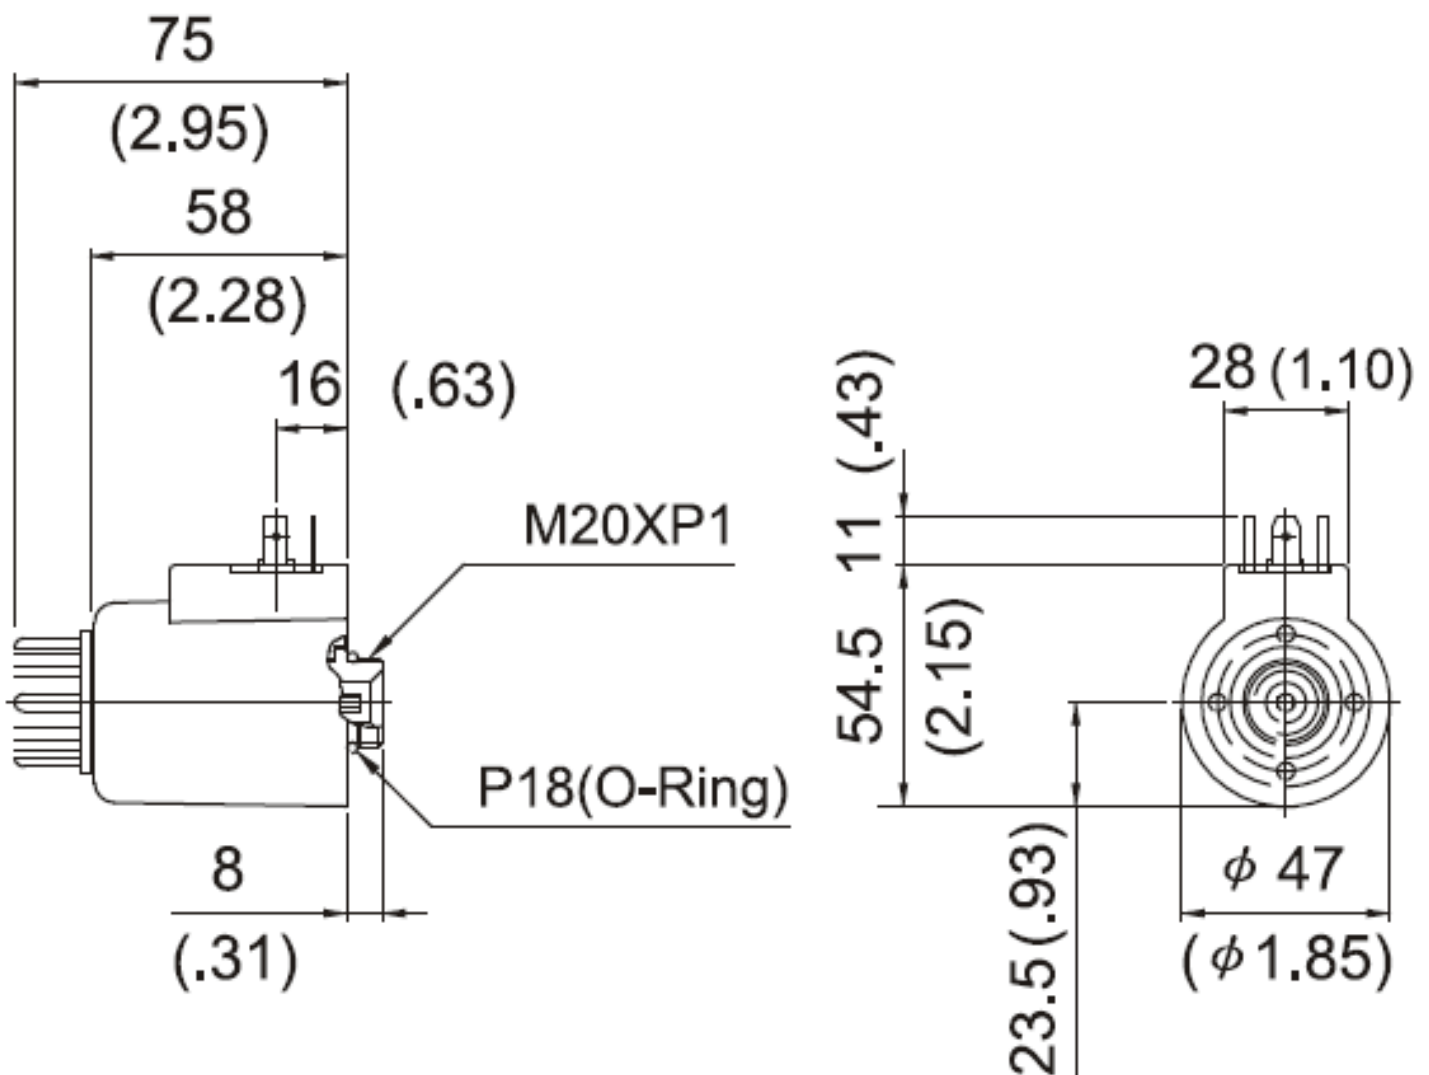

□ **COIL**

Insulation high voltage test : 1500 V/min. (1800 V/sec.)

Double insulation wiring, hermetically sealed for moisture-resistance. Insulation class : H

Maximum allowable coil temperature: +150C (+300F)

Do not exceed permissible voltage range of the coil used.

Do not supply electric power to the AC solenoid unless the coil is mounted to the valve.

DIN type coil with 360 possible orientation.

No-spring type (DSHG-2N*-04/06/10) one of the coil should be energized continuously to avoid malfunction.

On double solenoid valves, do not energize both at the same time as it will result in coils burning out.

SOLENOID SPECIFICATIONS

AC/DC CURRENT		AC				DC			
						RECTIFIED INSIDE			
VOLTAGE (V)		AC110V		AC220V		R110V	R220V	DC12	DC24
FREQUENCY (Hz)		50	60	50	60	50/60	50/60		
DSG (01) 1/8"	Starting current (A)	2.38	2.33	1.19	1.17	-	-	-	-
	Holding current (A)	0.40	0.45	0.20	0.23	0.30	0.15	2.2	1.1
	Holding electrical power (W)	-	-	-	-	26	26	26	26