


Additional Data/Spec Sheet

NG6 Subplate G06 with Relief Valve 50-210Bar


SUBPLATE

TYPE ES3B12LL AND ES3B38...

Subplate, A-B side ports, P-T ports on side and rear, with relief valve.

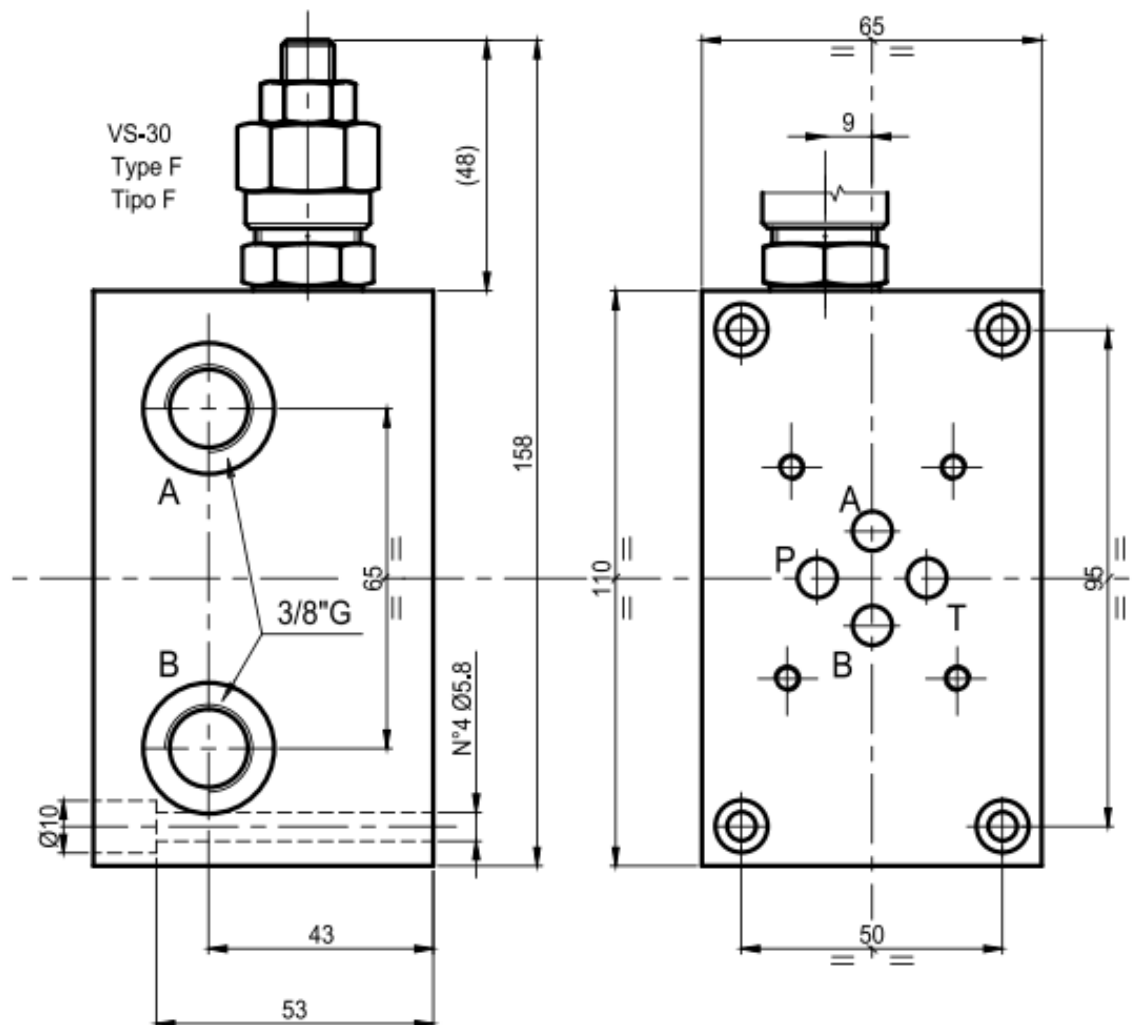


Hydr. symbol
schema idraulico

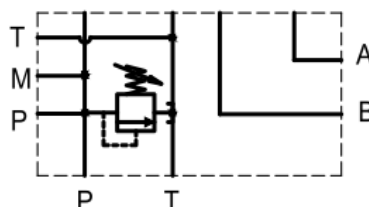

Pressure relief valve type : VS-30

Valvola limitatrice di pressione tipo : VS-30

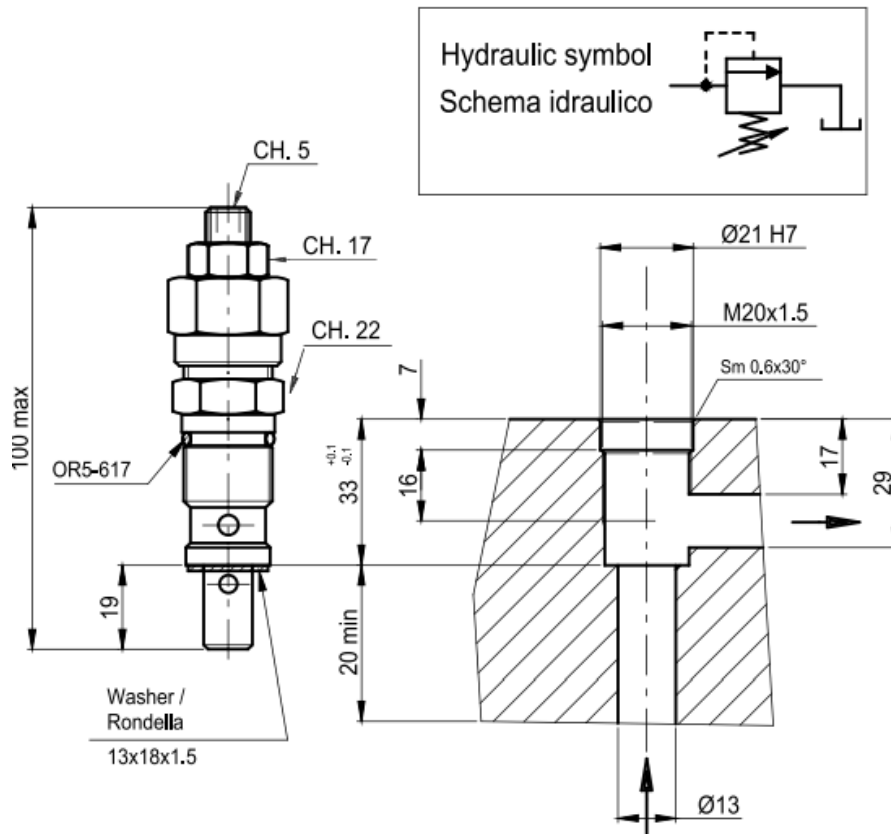

Characteristics Caratteristiche	Spring type/Tipo molla				Setting type Tipo regolazione			
	N°	color colore	Setting range campo di taratura min-max (bar)	Increase of pressure incremento pressione bar/turn of screw bar/giro vite	standard setting taratura Q=5 l/min (bar)	F = by key a chiave Ø28 54 max	V = Handwheel Volantino Ø35 max 85	P = Plastic knob Pomolo Ø40 81 max
Max. pressure Press. max di esercizio 350 bar	0	black/nero	5-50	12	50			
Max. flow/Portata max 30 l/min	1	blue/blu	30-100	24	100			
weight/Peso 0.17 Kg	2	green/verde	50-210	47	200			
	3	yellow/giallo	100-350	82	350			

