

Additional Date/Spec Sheet


NG10 Manually (Lever) Operated Directional Valve – Spring Centered - 3 Position – 3/8"
 Energized Side A: P→A, B→T | Center/Neutral: all Ports Open | Energized Side B: A→T, P→B

<p>SPRING CENTERED</p> <p>3 POSITION</p>	<p>GRAPHIC SYMBOLS</p> <p>(STANDARD)</p>
--	--

3C3



DMG-03-30 Manually Operated Directional Valves(Sub-Plate Type)

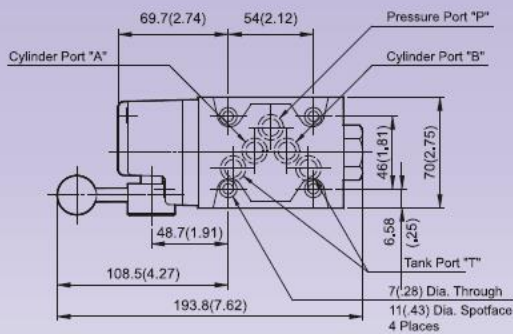

Valve Specifications & Attachment

Model	DMG-03
Flow Rating	120 lpm (31.7 gpm)
Max. Pressure	315 bar (4500 psi)
Weight kg(lbs.)	3.8 (8.3)
CODE:20	M5 X45Lx4pcs
CODE:2090	10-24UNCX1/3/4"1gX4pcs
Surface O-Ring	P12X5pc

