


Additional Date/Spec Sheet

Cetop 5 NG10 DSG-N 03 AC Standard Coils

DSG
03
AC

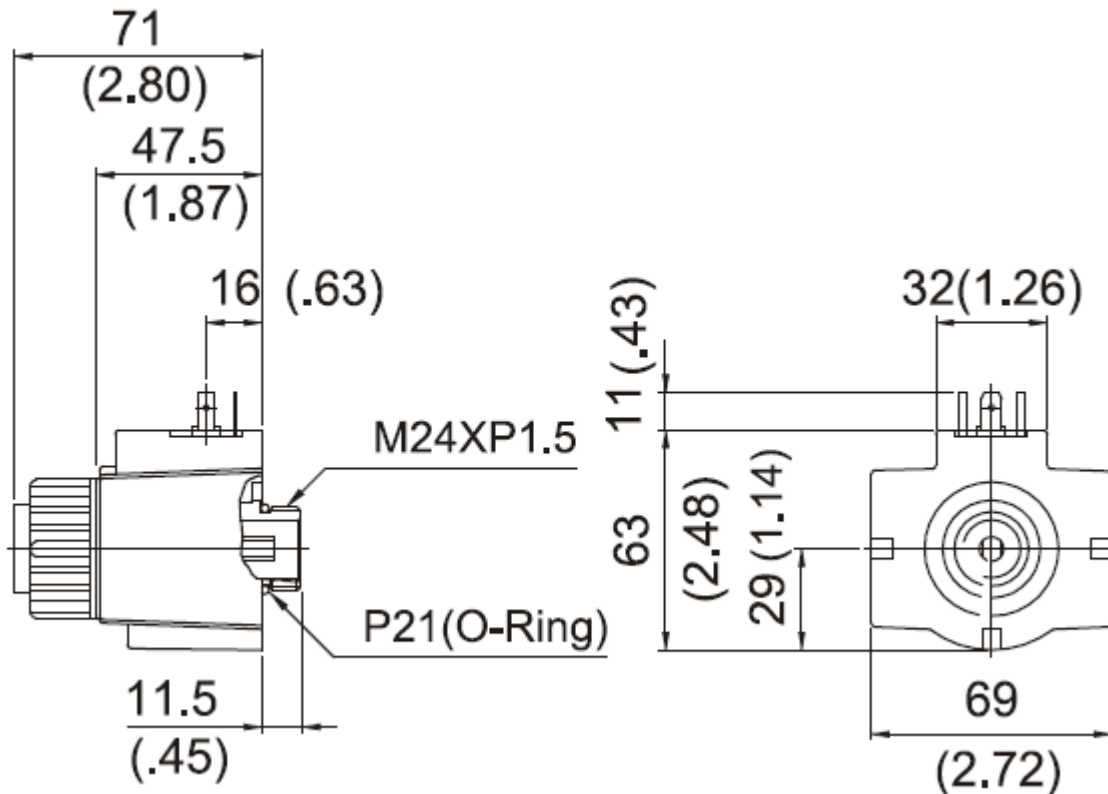

COIL

Insulation high voltage test : 1500 V/min. (1800 V/sec.)
 Double insulation wiring, hermetically sealed for moisture-resistance. Insulation class : H
 Maximum allowable coil temperature: +150C (+300F)
 Do not exceed permissible voltage range of the coil used.
 Do not supply electric power to the AC solenoid unless the coil is mounted to the valve.
 DIN type coil with 360 possible orientation.
 No-spring type (DSHG-2N*-04/06/10) one of the coil should be energized continuously to avoid malfunction.
 On double solenoid valves, do not energize both at the same time as it will result in coils burning out.

AC/DC CURRENT		AC			
VOLTAGE (V)		AC110V		AC220V	
FREQUENCY (Hz)		50	60	50	60
DSG (03) 3/8"	Starting current (A)	5.37	5.03	2.69	2.52
	Holding current (A)	0.70	0.75	0.30	0.35
	Holding electrical power (W)	-	-	-	-
Permissible voltage		95~120		200~235	