

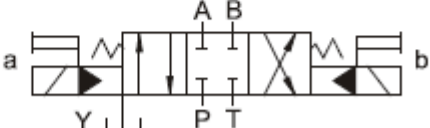
Additional Date/Spec Sheet

Cetop 7 NG16 Pilot Operated Directional Control Valve – **SPOOL ONLY** – 3C2

These Spools will only work in a Hystar Valve.

HYSTAR®

LIST OF SPOOL FUNCTIONS (DSHG-04/06/10)

SPRING CENTERED 3 POSITION	GRAPHIC SYMBOLS (STANDARD)
3C2	

Additional Data

NG16 Valves are operated by NG6 solenoid valves on top. For double solenoid NG16 valves, use the DSG 3C4 No1 valve and for single Solenoid NG16 valve use a DSHG 3C2 or 3C3 N04 together with a DSG 2B3 No1 valve. All NG16 valves can be set up in a workshop as "internal" or "external" pilot and "internal" or "external" drain. Ask for assistance if you are not quite clear on this. It is VERY important that the correct configuration be given.!!!

NG16 Valves require a minimum of 4-8Bar, max 250Bar pilot pressure!

High Flow

DSHG-(N)-04 are capable of controlling oil flow up to 300Lpm (79.3gpm)

Flow rate is a little different between different spool types

High Pressure

DSHG-(N)-04 Max operating pressure up to 315Bar (4500Psi)

Totally enclosed molded coil. Specially treated pressure resistant inner tube (SUS304). High grade steel cored (C2503) coil with wet solenoid. All moving parts are immersed in operating oil and muffled to provide low noise operation.

Backpressure

DSHG-(N)-04 permissible backpressure, internal drain 160Bar (2300Psi) and 210Bar (3000Psi) for external drain. Pipe the return back to tank below the oil level.

Body

Bodies are of high tensile cast iron with large shell cored passages. Spool bores are precision honed with accurately machined land locations.

Spools

Spools are hardened alloy steel (SCM21), precision ground and incorporate balancing grooves. All spools are interchangeable with valve body simplifying maintenance.

Assembly Installation

Spring Centered 3c* valves have no orientation limitation. The DSHG-(N)-04 mounting surface dimensions confirm to ISO 4401, Hydraulic fluid power-Four-port directional control valves-mounting surface. The installation surface should be finer than 6.3S.