

### Additional Data/Spec Sheet

#### BMM Series Gerotor Gear Type – Hydraulic Orbital Motors – Axil Distribution Motors

BMM series motor are small volume, economical type, which is designed with shaft distribution flow, which adapt the Gerotor gear set design and provide compact volume, high power and low weight.

#### Characteristic features:

- \* Advanced manufacturing devices for the Gerotor gear set, which provide small volume, high efficiency and long life.
- \* Shaft seal can bear high pressure of motor of which can be used in parallel or in series.
- \* Advanced construction design, high power and low weight.

#### Main Specification

Type		BMM 8	BMM 12.5	BMM 20	BMM 32	BMM 40	BMM 50
Geometric displacement (cm <sup>3</sup> /rev.)		8.2	12.9	19.9	31.6	39.8	50.3
Max. speed (rpm)	cont.	1950	1550	1000	630	500	400
	int.	2450	1940	1250	800	630	500
Max. torque (N•m)	cont.	11	16	25	40	45	46
	int.	15	23	35	57	70	88
	peak	21	33	51	64	82	100
Max. output (kW)	cont.	1.8	2.4	2.4	2.4	2.2	1.8
	int.	2.6	3.2	3.2	3.2	3.2	3.2
Max. pressure drop (MPa)	cont.	10	10	10	10	9	7
	int.	14	14	14	14	14	14
	peak	20	20	20	16	16	16
Max. flow (L/min)	cont.	16	20	20	20	20	20
	int.	20	25	25	25	25	25
Weight (kg)		1.9	2	2.1	2.2	2.3	2.4

Type		Max.inlet pressure
BMM8-50 (MPa)	cont.	17.5
	int.	22.5

- \* Continuous pressure:Max. value of operating motor continuously.
- \* Intermittent pressure:Max. value of operating motor in 6 seconds per minute.
- \* Peak pressure:Max. value of operating motor in 0.6 second per minute.

## Performance Data

BMM8 [8.2 cm<sup>3</sup>/rev.]

Pressure (MPa)

		Max.cont.			Max.int.		
		3.5	5	7	10	12	14
Flow (L/min)	2	3	5	8	10	12	14
	4	228	218	206	156	111	58
	8	474	471	463	426	391	331
	12	953	946	926	884	855	816
	15	1444	1426	1402	1360	1324	1288
Max.cont.	20		4	7	10	12	14
Max.int.	20			6	10	11	14
	20			2395	2350	2328	2281

BMM12.5 [12.9 cm<sup>3</sup>/rev.]

Pressure (MPa)

		Max.cont.			Max.int.		
		3.5	5	7	10	12	14
Flow (L/min)	2	6	8	11	16	19	
	4	140	136	119	68	35	
	8	296	289	274	229	200	145
	12	605	596	583	543	514	469
	15	912	905	895	859	834	784
Max.cont.	20	5	7	11	16	19	23
Max.int.	20	3	7	10	15	19	22
	25	2	6	9	14	18	22
	25	1910	1891	1878	1848	1828	1788

BMM20 [19.9 cm<sup>3</sup>/rev.]

Pressure (MPa)

		Max.cont.			Max.int.				
		1.7	3.5	5	7	10	12	14	
Flow (L/min)	2	3	9	14	19	26	30		
	4	99	96	89	74	42	21		
	8	197	191	182	178	134	112	74	
	12	398	395	391	377	340	319	288	
	15	596	594	588	579	545	523	493	
Max.cont.	20	3	8	13	18	26	31	37	
Max.int.	20	1	6	11	19	24	29	35	
	25		4	9	14	23	28	33	
	25			1247	1245	1242	1189	1180	1176

BMM32 [31.6 cc/rev.]

Pressure (MPa)

		Max.cont.			Max.int.			
		2	3.5	5	7	10	12	14
Flow (L/min)	2	7	15	21	28	40		
	4	61	57	52	47	16		
	8	126	121	114	106	82	48	57
	12	250	244	239	231	207	194	167
	15	378	374	369	362	338	322	297
Max.cont.	20	4	12	18	27	39	47	57
Max.int.	20	3	10	17	25	37	46	55
	25	1	8	15	23	35	43	52
	25	791	789	787	783	766	753	732

BMM40 [39.8 cm<sup>3</sup>/rev.]


Pressure (MPa)

	Max.cont.			Max.int.		
	3	5	7	8.5	10	12
Flow (L/min)	2	16 <b>45</b>	27 <b>40</b>	36 <b>34</b>	44 <b>28</b>	51 <b>17</b>
	4	16 <b>96</b>	27 <b>93</b>	37 <b>85</b>	44 <b>79</b>	52 <b>65</b>
	8	15 <b>197</b>	26 <b>195</b>	36 <b>182</b>	44 <b>176</b>	52 <b>166</b>
	12	14 <b>293</b>	25 <b>287</b>	35 <b>282</b>	43 <b>277</b>	51 <b>268</b>
	15	13 <b>371</b>	24 <b>365</b>	34 <b>360</b>	42 <b>355</b>	50 <b>347</b>
	Max.cont.	20	10 <b>497</b>	21 <b>492</b>	31 <b>487</b>	39 <b>480</b>
Max.int.	25	7 <b>622</b>	19 <b>617</b>	29 <b>612</b>	37 <b>607</b>	44 <b>600</b>


Torque (N•m) 37  
 Speed (rpm) 607

## BMM END PORT DIMENSIONS AND MOUNTING DATA


### MOUNTING - Flange M

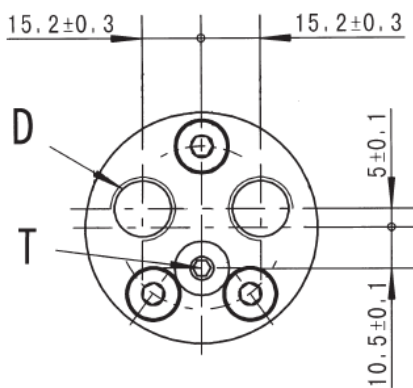

	M、 U Flange	
Model	L	L1
BMM8	104	3.5
BMM12.5	106	5.5
BMM20	109	8.5
BMM32	114	13.5
BMM40	117.5	17

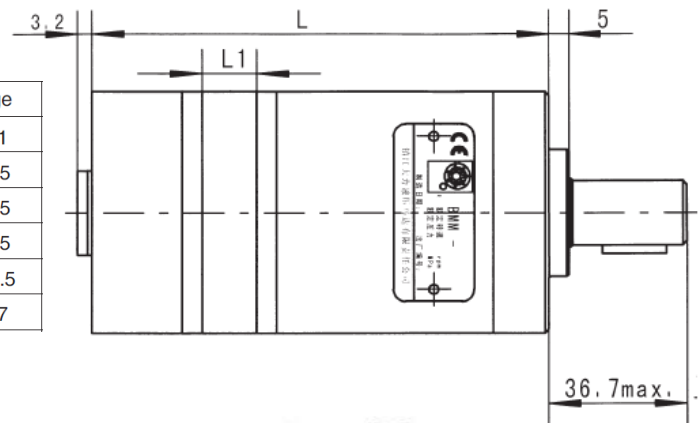


		M、 U Flange	
Mounting	Code	1E (depth)	1U (depth)
	C		[M]3-M6 (10)
D		G3/8 (12)	9/16-18UNF(12)
T		G1/8 (8)	3/8-24UNF(8)

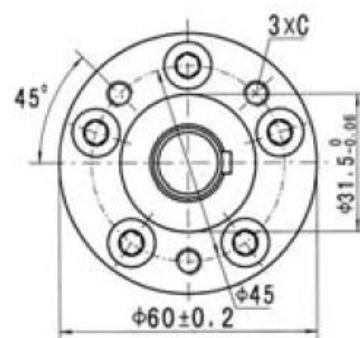



## Direction of shaft rotation: Standard


When facing shaft end of motor, shaft to rotate:  
Clockwise when port "A" is pressurized.  
Counter-clockwise port "B" is pressurized.

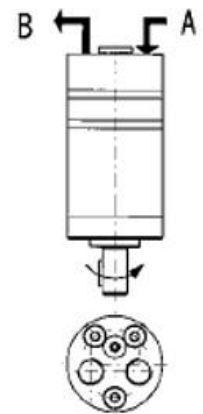

BMM End Port

## Status of the shaft's radial force

$$F_r = \frac{13040}{61.5 + L} \text{ daN}$$

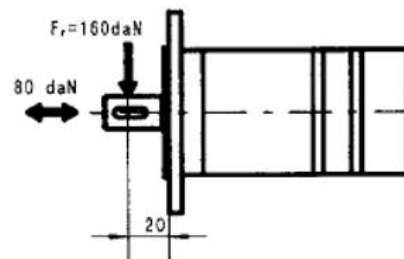

$F_r$  = Radial Force (daN)  
L = Distance (mm)  
n = Speed (rpm)  
Max. force load  
Rhomb-flange L=15mm  
Square-flange L=20mm