


Additional Data/Spec Sheet

Pneumatic Air & Gas Quick Coupler – 50 Series – ARO 210 Interchange – Manual Sleeve – Single Shut Off

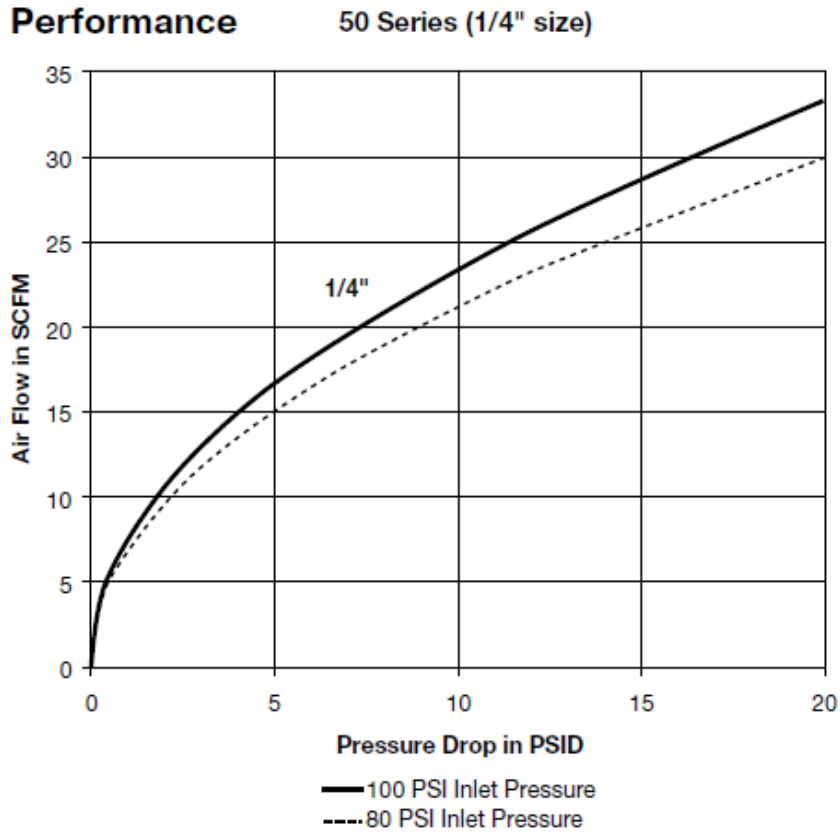

| 50 Series Specifications | |
|-------------------------------|-----------------|
| Body Size | 1/4 |
| Rated Pressure (psi) | 300 |
| Temperature Range (std seals) | -40° to +250° F |
| Locking Device | 4 balls |
| Vacuum Service | Not Recommended |

Nipples - Female Pipe Thread



| Body Size | Part No. Steel | Thread Size | Length | Largest Diameter | Exposed Length** | Wrench Flats | Weight (lbs) |
|-----------|----------------|-------------|--------|------------------|------------------|--------------|--------------|
| 1/4 | A3C | 1/4-18 NPTF | 1.47 | 0.72 | 0.66 | 0.62 | 0.04 |

50 Series Pneumatic Couplers are interchangeable with ARO's 210 series. Couplers have brass bodies. Nipples are constructed of steel. Sleeve-Lok is an optional feature.

Features:

- Integral sleeve guard resists accidental disconnection
- Tubular valve delivers high air flow with minimal pressure drop
- Standard seal is Nitrile

Applications include:

- Air compressors
- Pneumatic tools
- Water
- Grease
- Paint