


## **Additional Data/Spec Sheet**

Pneumatic Air & Gas Quick Coupler – 20 Series – Industrial Interchangeable Nipples – Manual Sleeve - Single Shut Off

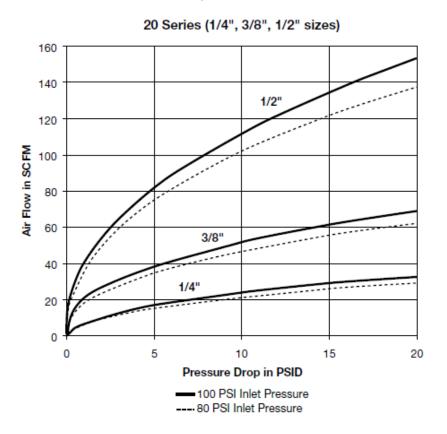

10 Series Specifications			
Body Size	1/4	3/8	1/2
Rated Pressure (psi)	300		
Temperature Range (std seals)	-40° to +250° F		
Locking Device	4 balls	8 balls	8 balls
Vacuum Data (in. Hg.)	_		
Disconnected (coupler only)	Not Recommended		
Connected	27.4		

## **Couplers - Female Pipe Thread** Part Number Part Number Part Number Wrench Weight **Body** Largest Stainless Steel (303) \*\* **Thread Size** Length Size **Brass** Steel Diameter **Flats** (lbs.) B23 S23 1/4-18 NPTF 0.90 0.75 0.19 1/4 1.83



**20 Series** Pneumatic Couplers mate with Industrial Interchange nipples, the standard male tip of the pneumatic industry. Available options include Sleeve-Lok, stainless steel locking balls and springs, and grip-ring sleeve.

## **Features:**

- Mates with Industrial Interchange nipples manufactured to A-A-59439 (MIL-C-4109F, ISO 6150-B) global standards
- 1/4" body size has a brass body and steel valve, 3/8" body size has all steel construction
- Tubular valve delivers high flow with minimal pressure drop
- Integral sleeve guard resists accidental disconnection
- Standard seal is Nitrile

## **Applications:**

- Air compressors
- Pneumatic tools
- Water
- Grease
- Paint