


Additional Data/Spec Sheet

Pneumatic Air & Gas Quick Coupler – 30 Series – Industrial Interchangeable Nipples
 – Push to Connect Sleeve - Single Shut Off

Performance

30 Series (1/4" & 3/8" sizes)

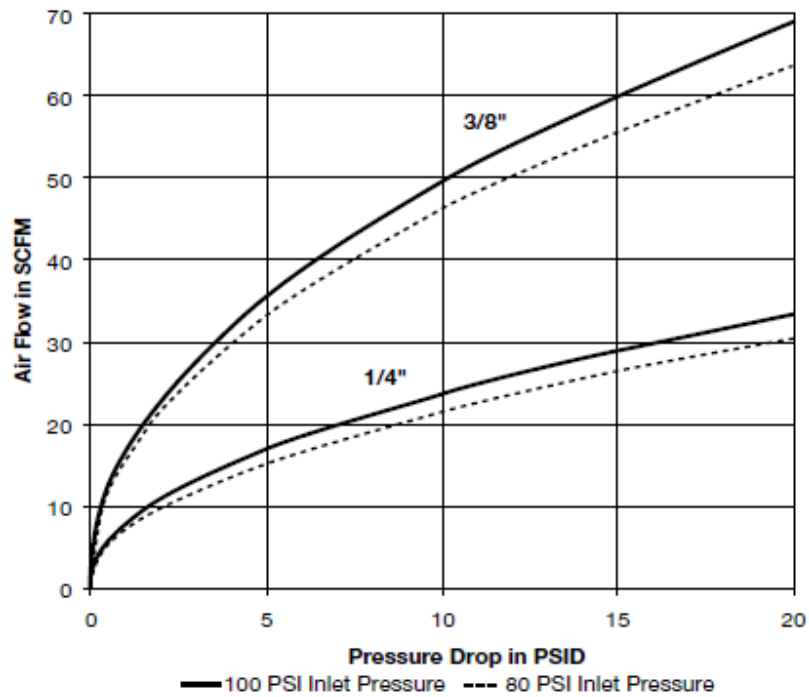

30 Series Specifications				
Body Size	1/4	3/8	1/2	3/4
Rated Pressure (psi)	300			
Temperature Range (std seals)	-40° to +250° F			
Locking Device	3 pawls	3 pawls	6 pawls	6 pawls
Vacuum Data (in. Hg.)	—			
Disconnected (coupler only)	Not Recommended			
Connected	27.4			

Couplers - Female Pipe Thread



Body Size	Part No. Brass	Thread Size	Length	Largest Diameter	Wrench Flats	Weight (lbs)
1/4	B33	1/4-18 NPTF	1.96	1.20	0.75	0.28



www.fluidco.co.za *Make it Happen!*

30 Series Pneumatic Couplers mate with Industrial Interchange nipples, the standard male tip of the pneumatic industry. The couplers have brass bodies. Standard seal is Nitrile.

Features:

- Mates with Industrial Interchange nipples manufactured to A-A-59439 (MIL-C-4109F, ISO 6150-B) global standards.
- Tubular valve delivers high flow with minimal pressure drop .
- Push-to-connect operation.
- Options include Sleeve-Lok, brass valve for added corrosion resistance, and alternative seal materials.

Applications include:

- Air compressors
- Pneumatic tools
- Water
- Grease
- Paint