



Dimensional Drawings:

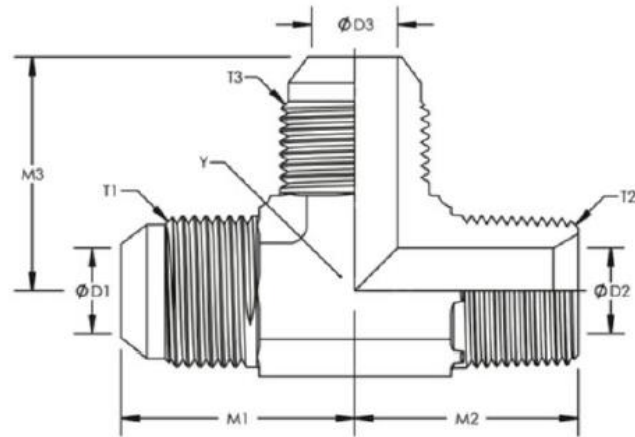

Product ID	Y HEX	T1	M1	D1	T2	M2	D2	T3	M3	D3
SS-2605-04-04-04	0.563	7/16-20	1.05	0.172	1/4-18	1.09	0.281	7/16-20	1.05	0.17
SS-2605-06-04-06	0.563	9/16-18	1.06	0.297	1/4-18	1.09	0.281	9/16-18	1.06	0.29
SS-2605-06-06-06	0.75	9/16-18	1.14	0.297	3/8-18	1.22	0.406	9/16-18	1.14	0.29
SS-2605-08-06-08	0.75	3/4-16	1.25	0.391	3/8-18	1.22	0.406	3/4-16	1.25	0.39
SS-2605-08-08-08	0.875	3/4-16	1.33	0.391	1/2-14	1.47	0.531	3/4-16	1.33	0.39
SS-2605-12-12-12	1.063	1-1/16-12	1.66	0.609	3/4-14	1.59	0.719	1-1/16-12	1.66	0.60
SS-2605-16-16-16	1.313	1-5/16-12	1.81	0.844	1-11-1/2	1.97	0.938	1-5/16-12	1.81	0.84

SAE J514 Pressure Ratings					
Nom. SAE Dash Size	Nom. Tube O.D. Inches	37 Degree Flare Straight Thread	Nom. Pipe Size	SAE St. Threads Union & Bulkhead (PSI)	Fittings With Pipe Threads (PSI)
2	1/8	5/16"-24	1/8"	5000	5000
3	3/16	3/8"-24	1/8"	5000	5000
4	1/4	7/16"-20	1/8"	5000	5000
5	5/16	1/2"-20	1/8"	5000	5000
6	3/8	9/16"-18	1/4"	5000	5000
8	1/2	3/4"-16	3/8"	4500	4000
10	5/8	7/8"-14	1/2"	3500	3000
12	3/4	1 1/16"-12	3/4"	3500	3000
14	7/8	1 3/16"-12	3/4"	3000	2500
16	1	1 5/16"-12	1"	3000	2000
20	1 1/4	1 5/8"-12	1 1/4"	2500	1150
24	1 1/2	1 7/8"-12	1 1/2"	2000	1000
32	2	2 1/2"-12	2"	1500	1000

NOTE: Since many factors influence the pressure at which a system will or will not perform satisfactory, values shown in this table should not be construed as guaranteed minimum.

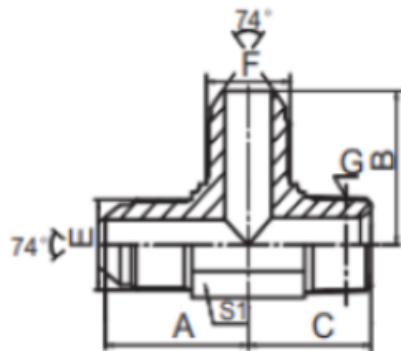

AJJN

JIC MALE/JIC MALE/NPT MALE

PART NO.	THREAD			DIMENSIONS				
	E	F	G	A	B	C	S1	
AJJN-04	7/16"X20	7/16"X20	Z1/4"X18	26.6	26.6	25.5	14	
AJJN-06-06-04	9/16"X18	9/16"X18	Z1/4"X18	26.9	26.9	25.5	14	
AJJN-06	9/16"X18	9/16"X18	Z3/8"X18	30	30	31	19	
AJJN-08-08-06	3/4"X16	3/4"X16	Z3/8"X18	32	32	31	19	
AJJN-08	3/4"X16	3/4"X16	Z1/2"X14	34.8	34.8	36.7	22	
AJJN-12	1.1/16"X12	1.1/16"X12	Z3/4"X14	44.2	44.2	44	27	
AJJN-16	1.5/16"X12	1.5/16"X12	Z1"X11.5	49	49	50	33	