FLUIDCO
HYDRAULIC SYSTEMS
Make it Happen!

BMM Series Gerotor Gear Type – Hydraulic Orbital Motors – Axil Distribution Motors

BMM series motor are small volume, economical type, which is designed with shaft distribution flow, which adapt the Gerotor gear set design and provide compact volume, high power and low weigth.

Characteristic features:

* Advanced manufacturing devices for the Gerotor gear set, which provide small volume, high efficiency and long life.
* Shaft seal can bear high pressure of motor of which can be used in parallel or in series.
* Advanced construction design, high power and low weight.

Main Specification

Type		BMM 8	BMM 12.5	BMM 20	BMM 32	BMM 40	BMM 50
Geometric displacement (cm^3/rev.)		8.2	12.9	19.9	31.6	39.8	50.3
Max. speed (rpm)	cont.	1950	1550	1000	630	500	400
	int.	2450	1940	1250	800	630	500
Max. torque (N•m)	cont.	11	16	25	40	45	46
	int.	15	23	35	57	70	88
	peak	21	33	51	64	82	100
Max. output (kW)	cont.	1.8	2.4	2.4	2.4	2.2	1.8
	int.	2.6	3.2	3.2	3.2	3.2	3.2
Max. pressure drop (MPa)	cont.	10	10	10	10	9	7
	int.	14	14	14	14	14	14
	peak	20	20	20	16	16	16
Max. flow (L/min)	cont.	16	20	20	20	20	20
	int.	20	25	25	25	25	25
Weight (kg)		1.9	2	2.1	2.2	2.3	2.4

Type		Max.inlet pressure
BMM8-50 (MPa)	cont.	17.5
	int.	22.5

* Continuous pressure:Max. value of operating motor continuously.
* Intermittent pressure:Max. value of operating motor in 6 seconds per minute.
* Peak pressure:Max. value of operating motor in 0.6 second per minute.

FLUIDCO
HYDRAULIC SYSTEMS
Make it Happen!

Performance Data

BMM8 [8.2 cm³/rev.]

Pressure (MPa)

Flow (L/min)	3.5	5	7	10 (Max.cont.)	12	14 (Max.int.)
2	3 **228**	5 **218**	8 **206**	10 **156**	12 **111**	14 **58**
4	3 **474**	5 **471**	7 **463**	11 **426**	13 **391**	15 **331**
8	3 **953**	5 **946**	7 **926**	11 **884**	13 **855**	15 **816**
12	2 **1444**	5 **1426**	7 **1402**	10 **1360**	13 **1324**	15 **1288**
15 (Max.cont.)		4 **1912**	7 **1900**	10 **1861**	12 **1833**	14 **1780**
20 (Max.int.)			6 **2395**	10 **2350**	11 **2328**	14 **2281**

BMM12.5 [12.9 cm³/rev.]

Pressure (MPa)

Flow (L/min)	3.5	5	7	10 (Max.cont.)	12	14 (Max.int.)
2	6 **140**	8 **136**	11 **119**	16 **68**	19 **35**	
4	6 **296**	8 **289**	12 **274**	17 **229**	19 **200**	23 **145**
8	5 **605**	8 **596**	12 **583**	17 **543**	20 **514**	24 **469**
12	5 **912**	8 **905**	11 **895**	16 **859**	20 **834**	24 **784**
15	5 **1152**	7 **1144**	11 **1136**	16 **1102**	19 **1078**	23 **1036**
20 (Max.cont.)	3 **1542**	7 **1532**	10 **1521**	15 **1500**	19 **1482**	22 **1437**
25 (Max.int.)	2 **1910**	6 **1891**	9 **1878**	14 **1848**	18 **1828**	22 **1788**

BMM20 [19.9 cm³/rev.]

Pressure (MPa)

Flow (L/min)	1.7	3.5	5	7	10 (Max.cont.)	12	14 (Max.int.)
2	3 **99**	9 **96**	14 **89**	19 **74**	26 **42**	30 **21**	
4	4 **197**	9 **191**	14 **182**	19 **178**	26 **134**	31 **112**	36 **74**
8	4 **398**	9 **395**	13 **391**	19 **377**	27 **340**	31 **319**	36 **288**
12	3 **596**	8 **594**	13 **588**	18 **579**	26 **545**	31 **523**	37 **493**
15	3 **745**	8 **741**	12 **738**	17 **728**	25 **695**	30 **684**	36 **660**
20 (Max.cont.)	1 **998**	6 **995**	11 **991**	19 **985**	24 **962**	29 **916**	35 **885**
25 (Max.int.)		4 **1247**	9 **1245**	14 **1242**	23 **1189**	28 **1180**	33 **1176**

BMM32 [31.6 cc/rev.]

Pressure (MPa)

Flow (L/min)	2	3.5	5	7	10 (Max.cont.)	12	14 (Max.int.)
2	7 **61**	15 **57**	21 **52**	28 **47**	40 **16**		
4	7 **126**	15 **121**	21 **114**	29 **106**	41 **82**	48 **67**	57 **49**
8	7 **250**	15 **244**	21 **239**	29 **231**	41 **207**	49 **194**	58 **167**
12	6 **378**	13 **374**	20 **369**	28 **362**	40 **338**	48 **322**	58 **297**
15	4 **476**	12 **472**	18 **468**	27 **462**	39 **441**	47 **429**	57 **406**
20 (Max.cont.)	3 **633**	10 **630**	17 **627**	25 **619**	37 **601**	46 **585**	55 **566**
25 (Max.int.)	1 **791**	8 **789**	15 **787**	23 **783**	35 **766**	43 **753**	52 **732**

BMM40 [39.8 cm³/rev.]


Pressure (MPa)

Flow (L/min)	3	5	7	Max.cont. 8.5	10	Max.int. 12
2	16 **45**	27 **40**	36 **34**	44 **28**	51 **17**	
4	16 **96**	27 **93**	37 **85**	44 **79**	52 **65**	62 **52**
8	15 **197**	26 **195**	36 **182**	44 **176**	52 **166**	63 **154**
12	14 **293**	25 **287**	35 **282**	43 **277**	51 **268**	62 **257**
15	13 **371**	24 **365**	34 **360**	42 **355**	50 **347**	62 **338**
Max.cont. 20	10 **497**	21 **492**	31 **487**	39 **480**	48 **472**	59 **463**
Max.int. 25	7 **622**	19 **617**	29 **612**	37 **607**	44 **600**	56 **591**


Torque (N•m) 37
Speed (rpm) **607**

BMM END PORT DIMENSIONS AND MOUNTING DATA


MOUNTING – Flange M

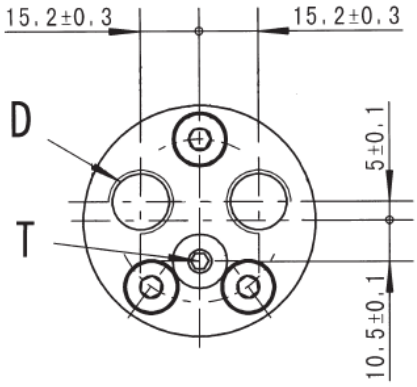

Model	M、U Flange L	L1
BMM8	104	3.5
BMM12.5	106	5.5
BMM20	109	8.5
BMM32	114	13.5
BMM40	117.5	17

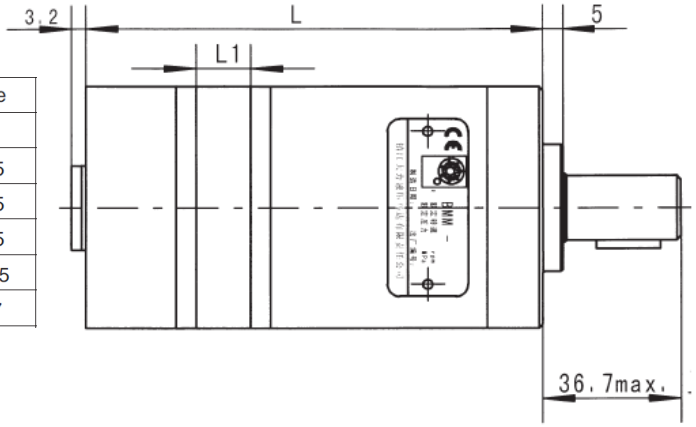


Mounting \ Code	M、U Flange 1E (depth)	1U (depth)
C	[M]3-M6 (10)	[U]3-1/4-28UNF-2B(10)
D	G3/8 (12)	9/16-18UNF(12)
T	G1/8 (8)	3/8-24UNF(8)

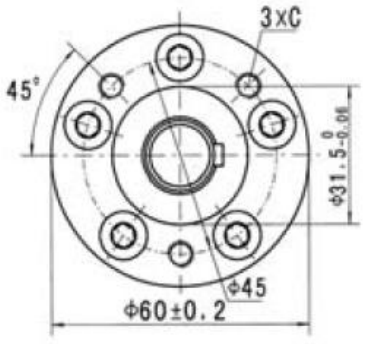

FLUIDCO
HYDRAULIC SYSTEMS
Make it Happen!


BMM SHAFT EXTENSIONS FOR BMM MOTORS


Shaft A: Cylindrical shaft ø16
Parallel key 5x5x16

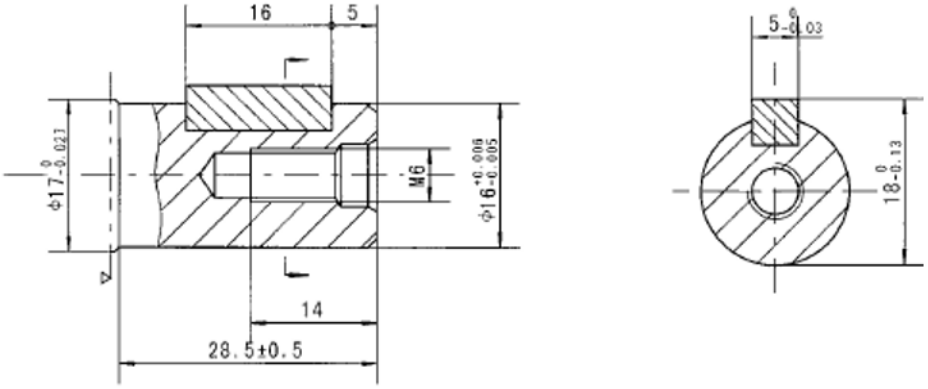

BMM Series Hydraulic Motor

Permissible shaft seal pressure




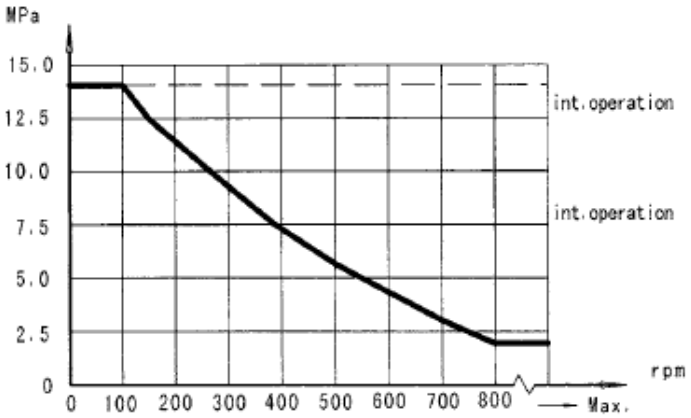

In applications without drain line, output shaft seal exceeds a bit of the pressure in the return line. When applications use the drain line, the pressure of output shaft seal equals the pressure in drain line.

Direction of shaft rotation: Standard


When facing shaft end of motor,shaft to rotate:
Clockwise when port "A" is pressurized.
Counter-clockwise port "B" is pressurized.

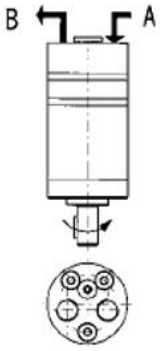

BMM End Port

Status of the shaft's radial force

$$F_r = \frac{13040}{61.5+L}\ daN$$

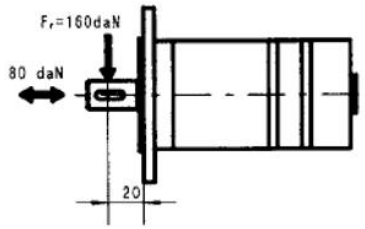

F_r=Radial Force (daN)
L =Distance (mm)
n =Speed (rpm)
Max.force load
Rhomb-flange L=15mm
Square-flange L=20mm