
FLUIDCO
HYDRAULIC SYSTEMS
Make it Happen!

High Pressure Ball Valves

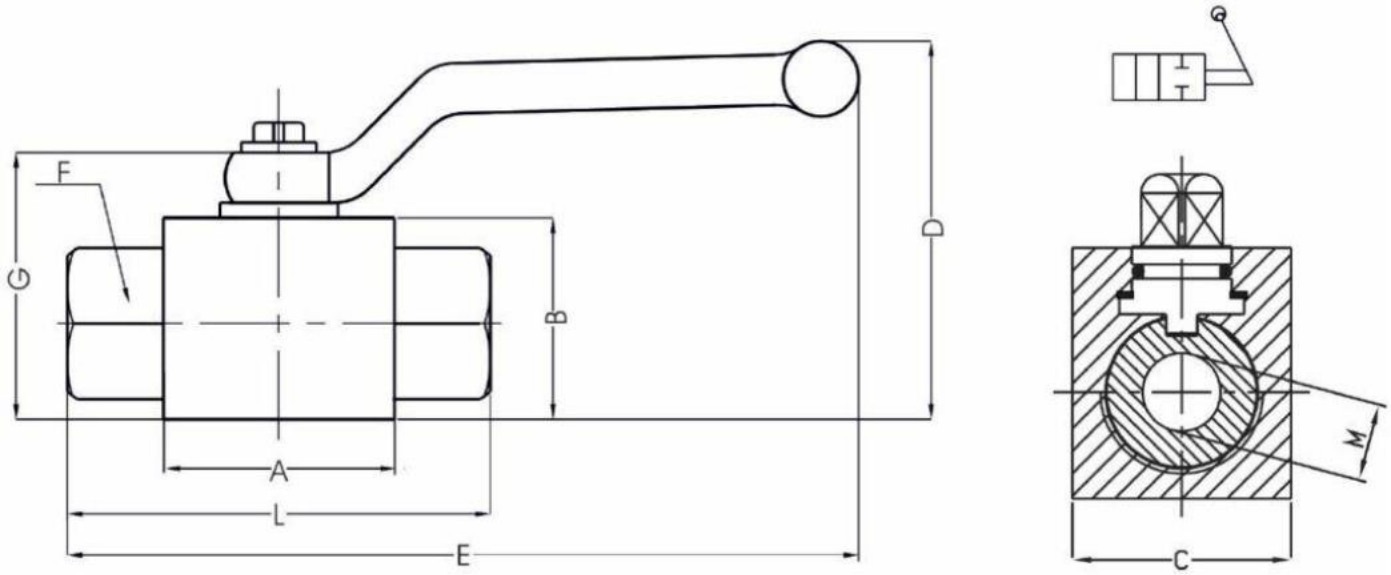

Fluidco Part nr	(Dimensions) - mm								
	M	A	B	C	D	E	F	G	L
BV-KHR-04	DN 10	45	35	30	75	150	24	48	75
BV-KHR-06	DN 10	45	35	30	75	150	24	48	75
BV-KHR-08	DN 13	50	40	35	80	150	30	53	84
BV-KHR-12	DN 20	60	55	45	118	240	38	73	96
BV-KHR-16	DN 25	70	60	55	120	250	46	78	118
BV-KHR-20	DN 25	70	60	55	120	260	50	78	133
BV-KHR-24	DN 25	70	60	55	120	260	55	78	140

Application

Excavators, plastic injection molding machines, chemical processing plants, cranes, tankers, dump trucks and general hydraulic applications

Additional General Info

BV2 Series Hydraulic 2 way Ball Valves are used to either shut off or open flow passage and their easy operation provides unrestricted flow. Due to their Volumetric structure they work rapidly and efficiently and prevent cavitation. BV2 Series Ball Valves can be locked in the open or closed position through locking washer on the circle pin Internal ball is hard chrome coasted steel and delrin (POM) seated. Ball Valves are suitable for LPG, CNG and other gas applications, as well as hydraulic and other industrial fluids.

40 Industry Road, Paarden Eiland, Cape Town, Western Cape Tell: 021 511 0590