

Visual Differenctial Clogging Indicator and HPVE Visual Electrical Clogging Indicator

For the FI-HPF High Pressure Filters

HPVE Visual Electrical Differential Clogging Indicator

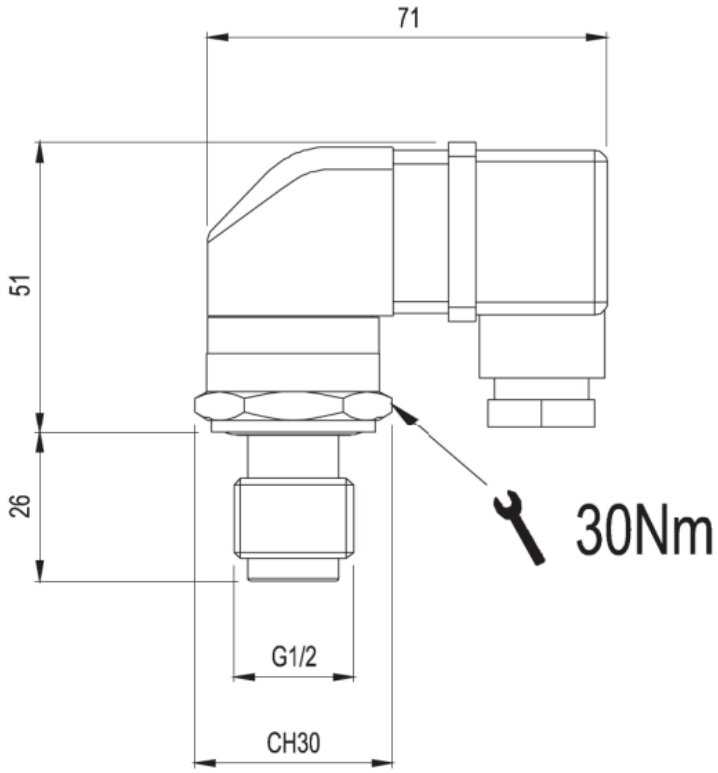

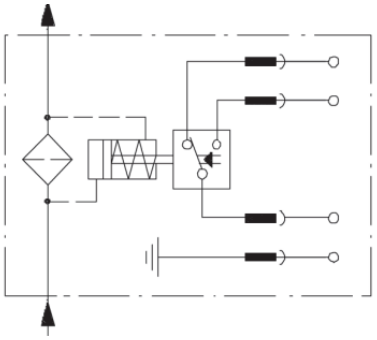

TECHNICAL FEATURES

Indicator body in brass
Max Working Pressure 420Bar
Working Temp: -35°C to +110°C
Seals are HNBR or FPM
Bodies and seals compatible
With Mineral oils to ISO 2943
Aqueous emulsions synthetic
fluids, water and glycol.
8Bar with No By-Pass/CV.
5Bar with By-Pass/CV.

40 Industry Road, Paarden Eiland, Cape Town, Western Cape Tell: 021 511 0590