


LP Brass Adapter Fittings – NPT Female x NPT Female Needle Valve

Needle Valve NV109P

Female Pipe to Female Pipe

*Provided with Pin Handle

Temperature Range: -45° to +250° F (-42.7° to +121.1° C)

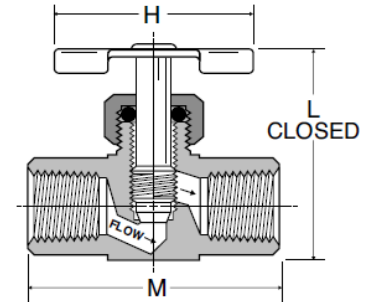


PART NO.	PIPE THREAD	H	L	M
NV109P-2*	1/8	1.50	1.35	1.25
NV109P-4	1/4	1.38	1.53	1.60

Needle Valve NV109P Female Pipe to Female Pipe

*Provided with Pin Handle

Temperature Range: -45° to +250° F (-42.7° to +121.1° C)

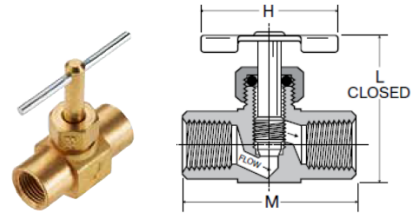

Part No.	Pipe Thread	H	I	M
NV109P-2*	1/8	1.50	1.35	1.25
NV109P-4	1/4	1.38	1.53	1.60

Product Features:

- Extruded Brass Body & Stem
- Low Temperature Seal
- Metal-to-Metal Seal
- Pin Handle



Specifications:

Pressure Range:

- Up to 150 PSI (10.3 bar)

Temperature Range

- -40° to +175° F (-20° to +79.4° C)
- Humidifier Valve Kit & Self Piercing Humidifier Kit:
-30° to +250° F (-34.4° to +121.1° C)
- NV311P/NV312P: 0° to +150° F (-17.7° to +65.5° C)

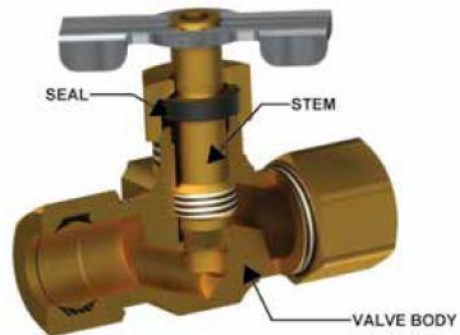

Needle Valves Installation Instructions

Series NV valves should always be installed with the pressure against the seat. Refer to drawing to determine correct direction of flow.