Mintor PLT Series | Vertical Visual Level Indicator with Thermometer


## TECHNICAL FEATURES:

- Protection in Anodized Aluminium Alloy
- Transparent parts in Polyamide
- Complete with seals, thermometer, screws and anchor nuts
- Easy to Assemble
- Tolerance of 0.5mm along the interhole axis
- Maintaining a perfect seal
- Working Temperature: 0°C to +80°C max
- Pressure: 2Bar max
- Torque: 10Nm max
- AVOID Contact with alcohol, toluol, glycol and paints on transparent parts!


| PLT Series \| Vertical Visual Level Gauge with Thermometer | | | | | | | | Dimensions mm | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Fluidco Part nr** | **Mintor Part nr** | **TYPE** | **L** | **r** | **v** | **c** | **i** | **f** | **CH** | **h** | **a** | **b** |
| LG-LIT-1-M10 | 1VPLT1A1 | PLT1 | 109 | 34 | 37 | 16.5 | 76 | M10 | 17 | 21.5 | 11 | 29 |
| LG-LIT-1-M12 | 1VPLT1A3 | PLT1 | 109 | 34 | 37 | 16.5 | 76 | M12 | 17 | 21.5 | 11 | 29 |
| LG-LIT-2-M10 | 1VPLT2A2 | PLT2 | 160 | 34 | 88 | 16.5 | 127 | M10 | 17 | 21.5 | 16 | 29 |
| LG-LIT-2-M12 | 1VPLT2A1 | PLT2 | 160 | 34 | 88 | 16.5 | 127 | M12 | 17 | 21.5 | 16 | 29 |
| LG-LIT-3-M12 | 1VPLT3A1 | PLT3 | 287 | 34 | 215 | 16.5 | 254 | M12 | 17 | 21.5 | 16 | 29 |

- Used for checking fluid level in large tanks.

**PLT1 & 2**

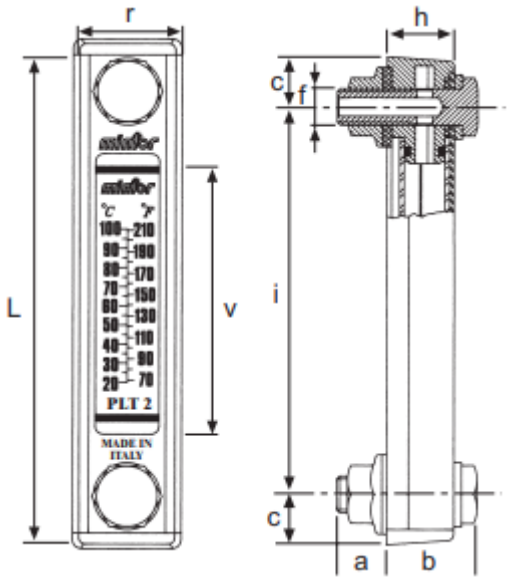


**PLT3**

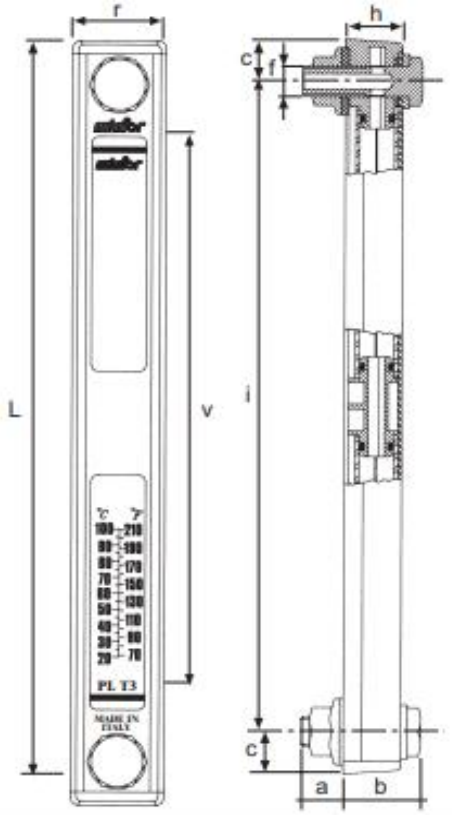


40 Industry Road, Paarden Eiland, Cape Town, Western Cape Tell: 021 511 0590