


Permanent Crimp No Skive Two Piece Ferrule/Collars for Thermoplastic Hose

Two piece fittings - Universal series for wire braided and 4 spiral hydraulic hoses

S00TK

No skive ferrule

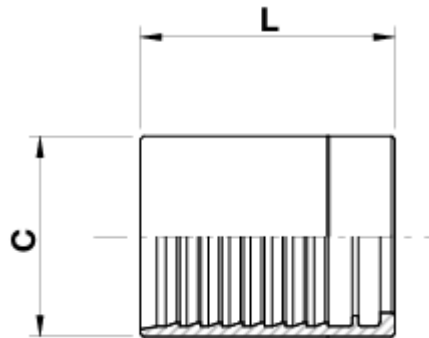

code	ø hose			C		L	
	dn	inch	size	mm	in	mm	in
S00TK-03	5	3/16"	03	14,0	0,55	25,4	1,00
S00TK-04	6	1/4"	04	16,0	0,63	29,5	1,16
S00TK-05	8	5/16"	05	19,0	0,75	29,5	1,16
S00TK-06	10	3/8"	06	21,0	0,83	32,1	1,26
S00TK-08	12	1/2"	08	26,0	1,02	32,7	1,29
S00TK-10	16	5/8"	10	30,0	1,18	37,0	1,46
S00TK-12	19	3/4"	12	33,0	1,30	42,0	1,65
S00TK-16	25	1"	16	40,0	1,57	52,0	2,05

Crimping chart

ASSEMBLING PARAMETERS FOR TWO PIECES S00TK NO SKIVE FERRULE FOR BRAID HOSE											
BORE DIAMETER			INSERT TYPE	FERRULE CODE	Crimping Diameter		Internal Skive Length		External Skive Length		Crimping Type
					mm	inch	mm	inch	mm	inch	
DN	inch	size			0 -0,2	0 -0,008	± 0,5	± 0,02	± 0,5	± 0,02	
5	3/16"	03	B03	S00TK03	12,2	0,480	NO	--	NO	--	FLAT
6	1/4"	04	B04	S00TK04	13,8	0,543	NO	--	NO	--	FLAT
8	5/16"	05	B05	S00TK05	17,0	0,669	NO	--	NO	--	FLAT
10	3/8"	06	B06	S00TK06	18,6	0,732	NO	--	NO	--	FLAT
12	1/2"	08	B08	S00TK08	22,8	0,898	NO	--	NO	--	FLAT
16	5/8"	10	B10	S00TK10	27,6	1,087	NO	--	NO	--	FLAT
19	3/4"	12	B12	S00TK12	29,5	1,161	NO	--	NO	--	FLAT
25	1"	16	B16	S00TK16	37,0	1,457	NO	--	NO	--	FLAT