
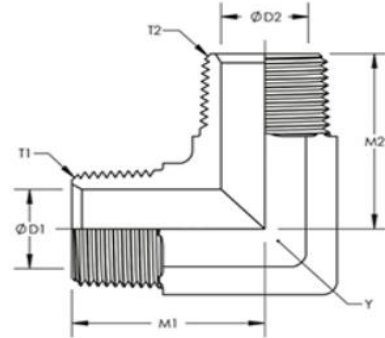


5500		NPT MALE - 90°			
Part No.	Price	NPT M	NPT M	Visual	
5500-02-02		1/8"	1/8"		
5500-04-04		1/4"	1/4"		
5500-06-06		3/8"	3/8"		
5500-08-08		1/2"	1/2"		
5500-12-12		3/4"	3/4"		
5500-16-16		1"	1"		
5500-20-20		1 1/4"	1 1/4"		
5500-24-24		1 1/2"	1 1/2"		
5500-32-32		2"	2"		

**Dimensional Drawings:**



Product ID	Y HEX	T1	M1	D1	T2	M2	D2
SS-5500-02-02	0.438	1/8-27	0.78	0.188	1/8-27	0.78	0.188
SS-5500-04-02	0.563	1/4-18	1.09	0.281	1/8-27	0.9	0.188
SS-5500-04-04	0.563	1/4-18	1.09	0.281	1/4-18	1.09	0.281
SS-5500-06-04	0.75	3/8-18	1.22	0.406	1/4-18	1.22	0.281
SS-5500-06-06	0.75	3/8-18	1.22	0.406	3/8-18	1.22	0.406
SS-5500-08-04	0.875	1/2-14	1.47	0.531	1/4-18	1.28	0.281
SS-5500-08-06	0.875	1/2-14	1.47	0.531	3/8-18	1.28	0.406
SS-5500-08-08	0.875	1/2-14	1.47	0.531	1/2-14	1.47	0.531
SS-5500-12-08	1.063	3/4-14	1.59	0.719	1/2-14	1.59	0.531
SS-5500-12-12	1.063	3/4-14	1.59	0.719	3/4-14	1.59	0.719
SS-5500-16-08	1.313	1-11-1/2	1.97	0.938	1/2-14	1.78	0.531
SS-5500-16-12	1.313	1-11-1/2	1.97	0.938	3/4-14	1.78	0.719
SS-5500-16-16	1.313	1-11-1/2	1.97	0.938	1-11-1/2	1.97	0.938
SS-5500-20-20	1.625	1-1/4-11-1/2	2.38	1.25	1-1/4-11-1/2	2.38	1.25
SS-5500-24-24	1.875	1-1/2-11-1/2	2.64	1.5	1-1/2-11-1/2	2.64	1.5

**NPT PRESSURE RATINGS, ANSI/ASME B 31.3**

SIZE	NPT	MALE		FEMALE	
		PSIG	BAR	PSIG	BAR
DESIGNATOR	SIZE				
2	1/8	10000	689	6500	447
4	1/4	8000	551	6600	454
6	3/8	7800	537	5300	365
8	1/2	7700	530	4900	337
12	3/4	7300	502	4600	316
16	1	5300	365	4400	303
20	1 1/4	6000	413	5000	344
24	1 1/2	5000	344	4600	316