
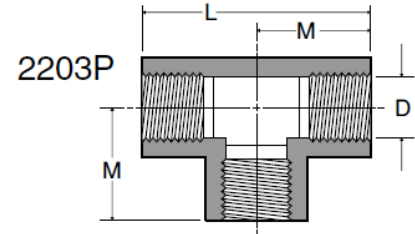



LP Brass Adapter Fittings – NPT Female Equal Tee

Union Tee 1203P-2203P

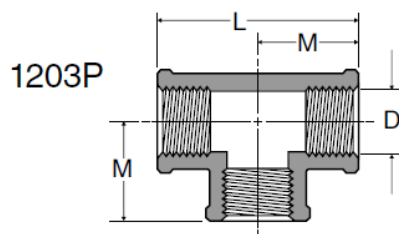

PART NO.	PIPE THREAD	L	M	FLOW DIA. D
1203P-2	1/8	1.12	.56	.339
2203P-2	1/8	1.06	.53	.339
1203P-4	1/4	1.38	.69	.441
2203P-4	1/4	1.52	.76	.441
2203P-6	3/8	1.68	.84	.571
1203P-8	1/2	2.14	1.07	.703
2203P-8	1/2	2.14	1.07	.703

Union Tee 1203P-2203P



Part No.	Pipe Thd	L	M	Flow Dia. D
1203P-2	1/8	1.12	.56	.339
1203P-4	1/4	1.38	.69	.441
1203P-6	3/8	1.66	.83	.57
1203P-8	1/2	2.12	1.06	.703
1203P-12	3/4	2.28	1.14	.91

1203P-2203P

Union Tee

Part Number	Pipe Thread
1203P-2	1/8
2203P-2	1/8
1203P-4	1/4
2203P-4	1/4
2203P-6	3/8
1203P-8	1/2
2203P-8	1/2
2203P-12	3/4



Assembly Instructions

Elbow or Tee Fittings

1. Hand tighten external thread into internal thread
2. Tighten an additional 1 to 1 1/2 turns with a wrench
3. Tighten fitting, clockwise to align with tubing. (Never counter clockwise)

Note: To minimize the possibility of a leaking threaded joint after assembling Male to female pipe threads, neither end should be backed out (loosened) Once the assembly has been made.